Transitioning to A-Level Physics



Hello and welcome! I am very glad that you have chosen to study A-Level Physics. The course is full of all kinds of great and interesting topics which I'm sure you will enjoy. The transition from year 11 to year 12 is a big step-up in terms of what is expected of you. Since there is so much content to cover in A-Level physics, it is expected that you already have a good understanding of the GCSE Physics topics and the maths skills that are required to understand them. The aim of this transition document is to fill in any gaps in your knowledge from GCSE and give you some insight into what we will be studying in A-Level.

I have chosen four topics which feature heavily in both GCSE and A-Level and therefore serve as a good bridge between the two courses:

Topic 1: Force and Motion

Topic 2: Energy Topic 3: Electricity Topic 4: Waves

Having a robust understanding of these topics will put you in good stead for when you begin KS5 in September.

How to use the transition document?

Each topic is divided into three sections:

Guidance and Practice: This section contains information about the topic, what they key pieces of knowledge are and what level you are expected to understand the topic at. Read through this information and answer the questions at the bottom of each page.

GCSE Exam Question: This section is one question from a higher tier paper. Each of these questions should take you approximately 10-15 minutes to complete. Answer these questions to the best of your ability.

A-Level Exam Question: This section is one question from an A-Level Physics paper. Do not stress if you don't know how to answer this question! You will be able to answer it by the time it comes to you're a-level exams. This section is to give you an idea of what you will be required to know and how you will need to apply your knowledge. Have a read through this question and attempt any parts that you can.

NB – This is not a test! Please use your books/internet to help you with any questions you find hard – the purpose of this is to help you update your GCSE knowledge. Remember you also have access to Seneca to help you revise those topics you are struggling with.

TOPIC 1: Force and Motion Guidance and Practice



Speed, Displacement and Velocity

Distance, Time and Speed are all Related

Points A and B are separated by a **distance** in **metres**. Now imagine a spider walking from A to B — you can measure the **time** it takes, in **seconds**, for it to travel this distance.



You can then work out the spider's average speed between A and B using this equation:

speed (in metres per second) = **distance travelled** (in metres) ÷ **time taken** (in seconds)

This is a very useful equation, but it does have a couple of limitations:

- It only tells you the average speed. The spider could vary its speed from fast to slow and even go backwards. So long as it gets from A to B in the same time you get the same answer.
- We assume that the spider takes the shortest possible path between the two points (a straight line), rather than meandering around.



Displacement is a Vector Quantity

To get from point A to point B you need to know what **direction** to travel in — just knowing the **distance** you need to travel **isn't enough**.

This information, **distance plus direction**, is known as the **displacement** from A to B and has the symbol **s**. It's a **vector** quantity — **all** vector quantities have both a **size** and a **direction**.

There is a Relationship Between Displacement and Velocity

Velocity is another **vector quantity** — velocity is the **speed** and **direction** of an object. The **velocity** of an object is given by the following equation:

velocity (in metres per second) = displacement (in metres) ÷ time taken (in seconds)

Or, in symbols: $v = \frac{1}{2}$

This equation is very similar to the one relating **speed** and **distance**, except that it includes information about the **direction of motion**.

Displacement's in a relationship with velocity now, it's so over time...

- An athlete runs a 1500 m race in a time of 210 seconds. What is his average speed?
- 2) The speed of light is 3.0 × 10⁸ ms⁻¹. If it takes light from the Sun 8.3 minutes to reach us, what is the distance from the Earth to the Sun?
- 3) A snail crawls at a speed of 0.24 centimetres per second. How long does it take the snail to travel 1.5 metres?
- 4) How long does it take a train travelling with a velocity of 50 ms-1 north to travel 1 km?
- 5) If someone has a velocity of 7.50 ms⁻¹ south, what is their displacement after 15.0 seconds?



Drawing Displacements and Velocities

You can use Scale Drawings to Represent Displacement

The simplest way to draw a vector is to draw an **arrow**. So for a displacement vector the **length** of the arrow tells you the **distance**, and the way the arrow **points** shows you the **direction**.



You can do this even for very large displacements so long as you scale down. Whenever you do a scale drawing, make sure you state the scale you are using.

EXAMPLE: Draw arrows to scale to represent a displacement of 3 metres upwards and a displacement of 7 metres to the right.

A displacement of 3 metres upwards could be represented by an arrow of length 3 centimetres.

Using this same scale (1 cm to 1 m) a displacement of 7 metres to the right would be an arrow of length 7 centimetres.

Scale: 1 cm to 1 m

You can also Represent Velocities with Arrows

Velocity is a **vector**, so you can **draw arrows** to show velocities too. This time, the **longer** the **arrow**, the **greater** the **speed** of the object. A typical scale might be 1 cm to 1 ms⁻¹.

EXAMPLE: Draw arrows to scale to represent velocities of 5 metres per second to the right and 3 metres per second downwards.

Draw the velocities like this with a scale of 1 cm to 1 ms⁻¹:

5 ms⁻¹

Scale: 1 cm to 1 ms⁻¹

Drawing displacements — not about leaving your sketchbook at home...

- 1) Draw arrows representing the following displacements to the given scale:
 - a) 12 m to the right (1 cm to 2 m)
 - b) 110 miles at a bearing of 270° (1 cm to 20 miles)
- Draw an arrow to represent each velocity to the given scale. Take north to be up the page.
 - a) 60 ms⁻¹ to the south-east (1 cm to 15 ms⁻¹)
 - b) 120 miles per hour to the west (1 cm to 30 miles per hour)




Combining Displacements and Velocities

You can use Arrows to Add or Subtract Two Vectors ...

To **add** two velocity or displacement vectors, you **can't** simply add together the two distances as this doesn't account for the **different directions** of the vectors. What you do is:

- Draw arrows representing the two vectors.
- Place the arrows one after the other "tip-to-tail".
- Draw a third arrow from start to finish. This is your resultant vector.

EXAMPLE: Add a displacement of 4 metres on a bearing of 090° to a displacement of 3 metres on a bearing of 060°. Use a scale of 1 cm to 1 m.




R is the **resultant** vector— it's the sum of the two displacements. You can find the size of R by measuring the arrow and scaling up. In this case it's 6.7 cm long which means the displacement is **6.7 m**.

To **subtract** vectors you need to **flip the direction** of the vector you are subtracting. This **changes the sign** of the vector.

Adding the flipped vector is the same as subtracting the vector.

...Or Use Pythagoras if the Vectors make a Right Angle Triangle

If two vectors, A and B, are at right angles to each other, you can also use Pythagoras' theorem to find the resultant.





EXAMPLE: An object has an initial velocity of 3.0 ms⁻¹ to the right, and a final velocity of 2.0 ms⁻¹ down. Find the size of the change in velocity.

Change in velocity = Δv = final velocity – initial velocity.

First, flip the direction and change the sign of the vector that is being subtracted. $2.0 \text{ ms}^{-1} = 2.0 \text{ ms}^{-1} + 3.0 \text{ ms}^{-1} = 2.0 \text{ ms}^{-1}$

$$A^2 + B^2 = C^2$$
, so $C = \sqrt{A^2 + B^2} = \sqrt{2.0^2 + 3.0^2} = 3.605... = 3.6 \text{ ms}^{-1}$ (to 2 s.f.)

(This answer is rounded to 2 s.f. to match the data in the question - see page 1.)

Subtracting velocity vectors is easy — subtracting velociraptors, less so...


- Find the size of the resultant of the following displacements by drawing the arrows "tip-to-tail".
 - a) 5.0 m right and 4.0 m up.
 - b) 15.0 miles south and 15.0 miles on a bearing of 045°.
- 2) Initial velocity = 1.0 ms⁻¹ west and final velocity = 3.0 ms⁻¹ north. Find the size of Δv .



Resolving Vectors

You can Split a Vector into Horizontal and Vertical Components


- Vectors like velocity and displacement can be split into components.
- This is basically the opposite of finding the resultant you start from the resultant vector and split it into two separate vectors at right angles to each other.
- 3) Together these two components have the same effect as the original vector.
- 4) To find the components of a vector, v, you need to use trigonometry:

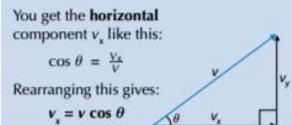

...and the **vertical** component v_y like this: $\sin \theta = \frac{v_y}{V}$ Rearranging this gives: $v_y = v \sin \theta$ You can also **rearrange** these equations to find θ . E.g. if you know v_{ν} and v then:

$$\theta = \cos^{-1}\left(\frac{V_X}{V}\right)$$

Resolving is dead useful because the two components of a vector **don't affect each other**. This means you can deal with the two directions **completely separately**.



If you throw a ball diagonally up and to the right...

- Only the vertical component of the velocity is affected by gravity (see page 7).
- You can calculate the ball's vertical velocity (which will be affected by gravity).
- And you can calculate the ball's horizontal velocity (which won't be affected by gravity).

EXAMPLE: A helium balloon is floating away on the wind.

It is travelling at 4.3 ms⁻¹ at an angle of 37° to the horizontal.

What are the vertical and horizontal components of its velocity?

It's useful to start off by drawing a diagram:

Horizontal velocity = $v_x = v \cos \theta = 4.3 \times \cos 37$ $= 3.434... = 3.4 \text{ ms}^{-1} \text{ (to 2 s.f.)}$ Vertical velocity = $v_y = v \sin \theta = 4.3 \times \sin 37$ $= 2.587... = 2.6 \text{ ms}^{-1} \text{ (to 2 s.f.)}$

Solve these questions by re-solving the vectors...

- A rugby ball is moving at 12 ms⁻¹ at an angle of 68° to the horizontal. Find the horizontal and vertical components of the ball's velocity.
- 2) A plane is travelling at 98 ms⁻¹ at a constant angle as it gains altitude. The horizontal velocity of the plane is 67 ms⁻¹. What is its angle of ascent?
- 3) A hot air balloon descends at a velocity of 5.9 ms⁻¹ at an angle of 23° to the horizontal. How long does it take the balloon to descend 150 m?



Acceleration

Acceleration — the Change in Velocity Every Second

Acceleration is the **rate of change** of **velocity**. Like velocity, it is a **vector quantity** (it has a size and a direction). It is measured in **metres per second squared** (ms⁻²).

Acceleration (in metres per second²) = $\frac{\text{change in velocity (in metres per second)}}{\text{time taken (in seconds)}}$

So: Acceleration = $\frac{\text{final velocity} - \text{initial velocity}}{\text{time taken}}$

Or in symbols: $a = \frac{v - u}{t} = \frac{\Delta v}{t}$ where u is the initial velocity, v is the final velocity and Δv is the change in velocity.

You'll often only need to think about velocities in **one dimension**, say left to right. But you still need to recognise the **difference** between velocities from right to left and velocities from left to right.

Choose a direction to be **positive** — below, we'll use **right**. All velocities in this direction will from now on be positive, and all those in the **opposite direction** (left) will be **negative**.

Deceleration is negative acceleration and acts in the opposite direction to motion.

EXAMPLE: A car starts off moving to the right at 15.0 metres per second. After 30.0 seconds it is moving to the left at 5.25 metres per second. What was its acceleration during this time?

 $u = 15.0 \text{ ms}^{-1} \text{ to the right} = +15.0 \text{ ms}^{-1}$ $v = 5.25 \text{ ms}^{-1} \text{ to the left} = -5.25 \text{ ms}^{-1}$ So, $a = \frac{v - u}{t} = \frac{-5.25 - 15.0}{30.0} = \frac{-20.25}{30.0} = -0.675 \text{ ms}^{-2}$ (The acceleration is negative so it's to the left.)



EXAMPLE: A dinosaur accelerates from rest at 4.00 ms⁻² to the right. If its final velocity is 25.0 ms⁻¹ to the right, how long does it accelerate for?

 $u = 0.00 \text{ ms}^{-1}$ $v = 25.0 \text{ ms}^{-1}$ to the right = +25.0 ms⁻¹ $a = \frac{v - u}{t}$, multiplying both sides by t gives $a \times t = v - u$, and then dividing both sides by a gives $t = \frac{v - u}{a}$. So, $t = \frac{25.0 - 0}{4.00} = 6.25 \text{ s}$

A seller rating is the key thing to check when buying a car online...

- A train has an initial velocity of 12.8 ms⁻¹ to the left. After 22.0 seconds it is moving to the right at 18.3 ms⁻¹. What was its average acceleration during this time?
- 2) A ship accelerates at a uniform rate of 0.18 ms⁻² east. If its initial velocity is 1.5 ms⁻¹ east and its final velocity is 4.5 ms⁻¹ in the same direction, how long has it been accelerating for?
- 3) A rabbit is hopping at a constant speed when he begins decelerating at a rate of 0.41 ms⁻². What was the rabbit's initial hopping speed if it takes him 3.7 seconds to come to a stop?



Acceleration Due To Gravity

The Acceleration Due to Gravity is g

When an object is dropped, it accelerates downwards at a constant rate of roughly 9.81 ms⁻². This is the **acceleration due to gravity** and it has the symbol **g**.

It usually seems sensible to take the upward direction as positive and down as negative, making the acceleration due to gravity -9.81 ms⁻².

EXAMPLE: What is the vertical velocity of a skydiver 5.25 seconds after she jumps out of a plane that is travelling at a constant altitude? (Ignore air resistance and horizontal motion.)

$$u = 0$$


 $a = -9.81 \text{ ms}^{-2}$
You can rearrange $a = \frac{v - u}{t}$ to give $v = u + (a \times t)$.
So $v = 0 + (-9.81 \times 5.25)$
 $= 0 - 51.5025$
 $= -51.5025 = 51.5 \text{ ms}^{-1} \text{ down (to 3 s.f.)}$



EXAMPLE: A diver jumps up off a springboard. After 2.50 seconds he hits the water travelling downwards at 18.0 ms⁻¹. What was his initial vertical velocity? (Ignore air resistance and horizontal motion.)

$$v = 18.0 \text{ ms}^{-1} \text{ down} = -18.0 \text{ ms}^{-1}$$

 $a = -9.81 \text{ ms}^{-2}$
You can rearrange $a = \frac{v - u}{t}$ to give $u = v - (a \times t)$.
So, $u = -18.0 - (-9.81 \times 2.50)$
 $= -18.0 - (-24.525)$
 $= -18.0 + 24.525$
 $= 6.525 = 6.53 \text{ ms}^{-1} \text{ upwards (to 3 s.f.)}$



This isn't falling, it's learning with style...

You can ignore air resistance in these questions. Hint — drawing a little diagram can help.


- An apple falls from a tree and hits the ground at 4.9 ms⁻¹. For how long was it falling?
- 2) A stone is thrown straight downwards. It hits the ground at 26.5 ms⁻¹ after 2.15 seconds. What velocity was it thrown at?
- 3) A metal rod falls from a stationary helicopter. What velocity does it hit the ground at, 10.0 seconds later?
- 4) A sandbag is dropped from a stationary hot-air balloon. It hits the ground at a velocity of 24.5 metres per second. How long was it falling for?
- 5) A ball is thrown straight upwards. After 1.90 seconds it is moving downwards at 10.7 ms⁻¹ and is caught. With what velocity was it thrown?



Displacement-Time Graphs

You can Draw Graphs to Show How Far Something has Travelled

- A graph of displacement against time tells you how far an object is from a given point, in a given direction, as time goes on.
- As the object moves away from that point the displacement on the graph goes up, and as it moves towards it the displacement goes down:

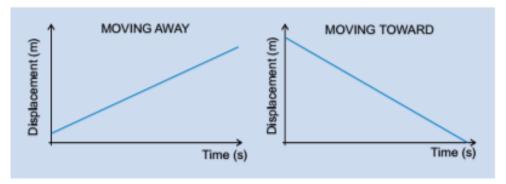


3) Important — these graphs only tell you about motion in one dimension. For example, a graph could tell you how far up a ball has been thrown, but not how far it has moved horizontally.


The Gradient of the Line is the Velocity


Velocity = displacement ÷ time (see p.2), so the **gradient** (slope) of a displacement-time graph tells you **how fast** an object is travelling, and **what direction** it is moving in.


The greater the gradient, the larger the velocity.



- If the line is straight, the velocity is constant.
- 2) If the line is **curved**, the velocity is **changing** the object is **accelerating** or decelerating.
- 3) A steepening curve means the object is accelerating and the velocity is getting larger.
- 4) A **flattening curve** means the **object** is **decelerating** and the **velocity** is getting **smaller**.







Steeper gradient = greater velocity — except when I try to run up a hill...

- 1) Sketch separate displacement-time graphs for a car in each of the following situations:
 - a) Travelling away from the observer at a constant velocity.
 - b) Travelling away from the observer and slowing down.
 - Not moving, a short distance from the observer.
 - d) Accelerating towards the observer.




Displacement-Time Graphs

EXAMPLE: The displacement-time graph below shows a motorcyclist accelerating to a constant speed, braking and then riding a short distance in the opposite direction.

You can read the following directly off the graph:

- He took 10 s to accelerate to full speed and he travelled 100 m in that time.
- He travelled at a constant velocity for the next 10 s and he travelled 200 m in that time.
- He took 5 s to decelerate (by braking) and stop. He travelled 50 m in that time.
- He remained stationary for 5 s at a displacement of 350 m from his starting point.
- 5) He accelerated in the opposite direction for 5 s.

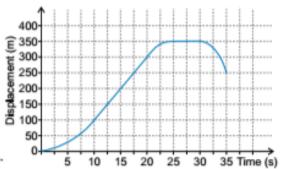

You can work out three more details of the motorcyclist's journey:

The value of the constant velocity he travelled at between 10 and 20 seconds.

velocity = gradient =
$$\frac{\text{change in displacement}}{\text{change in time}} = \frac{300 - 100}{20 - 10} = \frac{200}{10} = 20 \text{ ms}^{-1}$$

 His average velocity for the whole journey — found by dividing his overall change in displacement by the journey time.

average velocity =
$$\frac{\text{final displacement} - \text{initial displacement}}{\text{total time taken}}$$
$$= \frac{250 - 0}{35} = \frac{250}{35} = 7.142... = 7.1 \text{ ms}^{-1} \text{ (to 2 s.f.)}$$

 His average speed for the whole journey — found by dividing his total distance travelled by the journey time.

The total distance is the distance travelled in the positive direction (350 m) plus the distance travelled in the negative direction (100 m).


average speed =
$$\frac{\text{total distance travelled}}{\text{total time taken}} = \frac{350 + 100}{35} = 12.85... = 13 \text{ ms}^{-1}$$
 (to 2 s.f.)

Displacements — pretty lousy work experience if you ask me...

1) The displacement-time graph below shows the displacement of a racing car from the start line.

 a) Is the car accelerating or decelerating between 1 s and 2 s?

- Describe the motion of the car between 3 s and 6 s.
- c) What is the velocity of the car between 8 s and 10 s?
- d) What is the car's average velocity for the entire journey?
- e) What is the car's average speed for the entire journey?

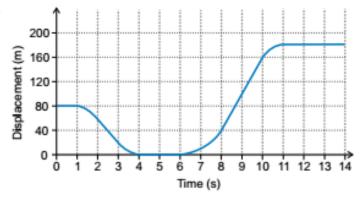






Velocity-Time Graphs

You can Draw Graphs to Show the Velocity of an Object

You can also draw graphs that show the velocity of an object moving in one dimension.








You can use a velocity-time graph to calculate two things:

- 1) The distance the object has moved.
- 2) The acceleration.

The Area Under the Line is the Distance Travelled

To find the distance an object travels between two times:

- Draw vertical lines up from the horizontal axis at the two times.
- 2) Work out the area of the shape formed by these lines.
- When you work out the area, you're multiplying time (the horizontal length) by average speed (the average vertical length), so the result is a distance.
- 4) You can work out the area in two ways:
 - Divide the shape into trapeziums, triangles, and/or rectangles and add up the area of each one.



Or work out how many metres each grid square on the graph is worth, then multiply
by the number of squares under the line. For squares cut by a diagonal part of
the line, you'll need to estimate the fraction of the square that's under the line.

EXAMPLE: What is the distance travelled between 1 second and 5 seconds?

The shape made by the area between 1 and 5 seconds can be divided into a rectangle, a trapezium and a triangle.

So the total area = area of rectangle + area of trapezium + area of triangle.


Area of rectangle = width \times height = $1 \times 6 = 6$ m

Area of trapezium = $\frac{1}{2}$ × (left side + right side) × width

 $= \frac{1}{2} \times (6 + 4) \times 2 = 5 \times 2$ = 10 m

Area of triangle = $\frac{1}{2}$ × width × height = $\frac{1}{2}$ × 1 × 4 = 2 m

So distance travelled = 6 + 10 + 2 = 18 m





Velocity-Time Graphs

The Gradient of the Line is the Acceleration

The acceleration of an object travelling in one dimension (see page 6) is given by:


Acceleration (in ms⁻²) =
$$\frac{\text{change in velocity (in ms}^{-2})}{\text{time taken (in s)}}$$

This is just the **gradient** of a velocity-time graph. This means that a velocity-time graph of an object's motion has a **negative gradient** when an object is **slowing down** (decelerating).

EXAMPLE: What is the acceleration between 10 and 20 seconds?

Acceleration =
$$\frac{4-3}{20-10}$$


= $\frac{1}{10}$
= **0.1 ms**⁻²



EXAMPLE: What is the acceleration between 5 and 15 seconds?

Acceleration =
$$\frac{10-15}{15-5}$$

= $\frac{-5}{10}$
= -0.5 ms^{-2}




A Curved Line means the Acceleration is Changing


If the line is curved, the acceleration is **not constant**.


A steepening curve means the acceleration is increasing.

A flattening curve means the acceleration is decreasing

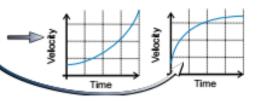

A steepening curve — my v-t graph when I find a spider in my room...

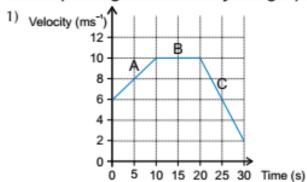

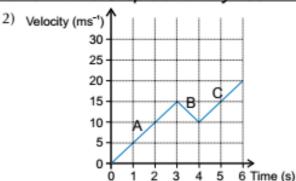


- a) Calculate the acceleration shown in sections A, B and C on each graph.
- b) Calculate the total distance travelled shown by each graph.



Adding and Resolving Forces

The Resultant Force is the Sum of All the Forces


- Force is a vector, just like displacement or velocity.
- When more than one force acts on a body, you can add them together in just the same way as you add displacements or velocities.
- 3) You find the resultant force by putting the arrows "tip-to-tail".
- 4) If the resultant force is zero, the forces are balanced.
- 5) If there's a resultant force, the forces are unbalanced and there's a net force on the object.

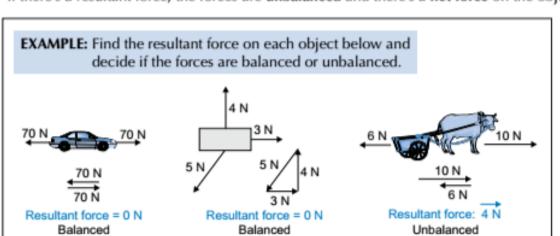

You can Resolve Forces just like Other Vectors

- Forces can be in any direction, so they're not always at right angles to each other.
 This is sometimes a bit awkward for calculations.
- To make an 'awkward' force easier to deal with, you can think of it as two separate forces, acting at right angles to each other. Forces are vectors, so you just use the method on p.5.

The force F has exactly the same effect as the horizontal and vertical forces, F_H and F_V . Use these formulas when resolving forces:



 $F_H = F \cos \theta$ and $F_V = F \sin \theta$

Unbalanced forces — a police officer and a tank on a seesaw...

1) Work out the resultant forces on these objects. Are the forces are balanced or unbalanced?







- 2) The engine of a plane provides a force of 920 N at an angle of 12° above the horizontal. What is the horizontal component of the force?
- 3) A kite surfer is pulled along a beach by a force of 150 N at an angle of 78° above the horizontal. What is the vertical component of the force?




Forces and Acceleration

Newton's First Law — a Force is Needed to Change Velocity

- 1) It's difficult to explain exactly what a "force" is, so instead we talk about what forces do.
- Forces stretch, squash or twist things, but most importantly forces make things go faster (or slower or change direction).
- Newton's First Law says that:

The velocity of an object will not change unless a resultant force acts on it.

- 4) This means an object will stay still or move in a straight line at a constant speed, unless there's a resultant force acting on it.
- 5) A resultant force is when the forces acting on an object are unbalanced (see p.12) e.g. when a car accelerates, the driving force from the engine is greater than the friction forces.
- If there's a resultant force, the object will accelerate in the direction of the resultant force.





Resultant force = 1500 – 1500 = 0 N No acceleration, so velocity doesn't change. Resultant force = 1200 - 750 = 450 NCar accelerates, so velocity increases.



Resultant force = 110 - 320 = -210 NBike decelerates, so velocity decreases.

Newton's Second Law — Acceleration is Proportional to Force

- According to Newton's First Law, applying a resultant force to an object makes it accelerate.
- Newton's Second Law says that:

The acceleration is directly proportional to the resultant force.

- 3) This means that if you **double** the **force applied** to an object, you **double its acceleration**.
- 4) You can write down this relationship as the equation:

resultant force (in newtons, N) = mass of object (in kg) \times acceleration of object (in ms⁻²) Or, in symbols:

 $F = m \times a$



Forces and Acceleration

Here are some Examples of Newton's Second Law

EXAMPLE: A car of mass 1250 kg accelerates uniformly from rest to 15 ms⁻¹ in 25 s. What is the resultant force accelerating it?

$$v = 15 \text{ ms}^{-1}$$
, $u = 0 \text{ ms}^{-1}$, $t = 25 \text{ s}$
 $a = \frac{v - u}{t}$, so $a = \frac{15 - 0}{25} = 0.60 \text{ ms}^{-2}$
Then $F = m \times a = 1250 \times 0.60 = 750 \text{ N}$

EXAMPLE: A cyclist applies a braking force of 150 N to come to a stop from a speed of 2.5 ms⁻¹ in 2.3 s. What is the total mass of the cyclist and their bike?

$$v = 0 \text{ ms}^{-1}$$
, $u = 2.5 \text{ ms}^{-1}$, $t = 2.3 \text{ s}$
Again $a = \frac{v - u}{t} = \frac{0 - 2.5}{2.3} = -1.086... \text{ ms}^{-2}$

The acceleration is negative because the cyclist is slowing down — the acceleration and the resultant force are in the opposite direction to the cyclist's motion.

Then
$$m = \frac{F}{a} = \frac{-150}{-1.086...} = 138 = 140 \text{ kg (to 2 s.f.)}$$

(This answer is rounded to 2 s.f. to match the data in the question — see page 1.)

Newton's Third Law — Forces have an Equal, Opposite Reaction

Newton's Third Law says that:

Each force has an **equal** and **opposite reaction** force.

This means that if object A exerts a force on object B, then object B must exert an **equal but opposite** force on object A.

For example — when you are **standing up**, you exert a force (your weight) on the floor and the floor **pushes back** with a force of the **same size** in the **opposite direction**. If it didn't you'd just **fall through the floor**...

Newton was awful at times tables — he was only interested in fours...

- A car pulls a caravan of mass 840 kg. If the car accelerates at 0.50 ms⁻², what force will the caravan experience?
- 2) An apple of mass 0.120 kg falls with an acceleration of 9.81 ms⁻². What is the gravitational force pulling it down (its weight)?
- 3) An arrow of mass 0.5 kg is shot from a bow. If the force from the bow-string is 250 N, what is the initial acceleration of the arrow?
- 4) What is the mass of a ship if a force of 55 000 N produces an acceleration of 0.275 ms⁻²?
- 5) A train of mass 15 000 kg accelerates from rest for 25 s. If the total force from the engines is 8600 N, what is the train's final velocity?




TOPIC 1: Force and Motion GCSE Exam Questions

Q1.

Figure 1 shows a boat floating on the sea. The boat is stationary.

Figure 1



(a) Figure 2 shows part of the free body diagram for the boat.

Complete the free body diagram for the boat.

Figure 2





kg

(4)

(b)	Calculate the mass of the boat.	
	Use the information given in Figure 2.	
	gravitational field strength = 9.8 N/kg	
	Give your answer to two significant figures.	


(c) When the boat propeller pushes water backwards, the boat moves forwards. The force on the water causes an equal and opposite force to act on the boat.

Which law is this an example of?

(1)

(d) Figure 3 shows the boat towing a small dinghy.

Figure 3



The tension force in the tow rope causes a horizontal force forwards and a vertical force upwards on the dinghy.

horizontal force forwards = 150 N vertical force upwards = 50 N

Figure 4 shows a grid.

Draw a vector diagram to determine the magnitude of the tension force in the tow rope and the direction of the force this causes on the dinghy.

Figure 4



		the state of the s		EDITOR OF STREET				
						10 11 12 12		
delibit delibit	DESCRIPTION OF THE PROPERTY OF		DESIGNATION OF THE PARTY OF THE		etal-la de la		DESCRIPTION OF THE PARTY OF THE	

Magnitude of the tension force in the tow ro	ope =	N
Direction of the force on the dinghy caused by the tension force in the tow rope	=	
•		(4)
		(Total 11 marks)



TOPIC 1: Force and Motion A-Level Exam Questions

Under what circumstances is the work done by a force negative?					
What happens to the kinetic energy of the body on which the force acts in such circum	nstances?				
A runaway sledge slides down a slope at a constant speed. One force is shown on the diagram of the sledge. It is the normal contact push of the snow on the sledge.	free-body				
Sledge					
Snow Add to the free-body diagram to show the other two forces acting on the sledge. Nam force and state what is producing it.	e each				
The sledge slides 15 m down the slope at a constant speed. The force N = 40 N.					
What is the resultant force acting on the sledge?					
What is the work done by the force N ?					



Kinetic Energy

Moving Things Have Kinetic Energy

Energy is a curious thing. You can't pick it up and look at it.

One thing's for certain though — if you're moving then you have energy.

This movement energy is more properly known as **kinetic energy**, and there's a formula for working it out:

If a body of **mass** m (in kilograms) is moving with **speed** v (in metres per second) then its **kinetic energy** (in joules) is given by:

kinetic energy = $\frac{1}{2} \times \text{mass} \times \text{speed}^2$

Or, in symbols:

$$E_{L} = \frac{1}{2} \times m \times v^{2}$$

Have a look at the following examples, and then try the questions after them.

EXAMPLE: A car of mass 1000 kg is travelling with a speed of 20 ms⁻¹. What is its kinetic energy?


$$E_k = \frac{1}{2} \times m \times v^2$$
, so $E_k = \frac{1}{2} \times 1000 \times 20^2$
= $\frac{1}{2} \times 1000 \times 400 = 200\ 000 = 2 \times 10^5\ J$

EXAMPLE: A ball has a speed of 2.5 ms⁻¹ and has kinetic energy equal to 0.75 J. What is the mass of the ball?

$$E_k = \frac{1}{2} \times m \times v^2$$

Multiplying both sides by 2 gives $2 \times E_k = m \times v^2$, then dividing both sides by v^2 gives $\frac{2 \times E_k}{v^2} = m$,

so
$$m = \frac{2 \times E_k}{v^2} = \frac{2 \times 0.75}{2.5 \times 2.5} = \frac{1.5}{6.25} = 0.24 \text{ kg}$$



EXAMPLE: A bullet has kinetic energy equal to 1200 J. If its mass is 15 g, what is its speed?


$$m = 15 g = 0.015 kg$$

From the previous example: $2 \times E_k = m \times v^2$

Dividing both sides by m gives $\frac{2 \times E_k}{m} = v^2$,

then taking square roots of both sides gives $\sqrt{\frac{2 \times E_k}{m}} = v$,

so
$$v = \sqrt{\frac{2 \times E_k}{m}} = \sqrt{\frac{2 \times 1200}{0.015}} = 400 \text{ ms}^{-1}$$



Kinetic energy — what you need lots of when you're late for the bus...

- An arrow of mass 0.125 kg is travelling at a speed of 72.0 ms⁻¹. What is its kinetic energy?
- 2) A ship has kinetic energy equal to 5.4 x 10⁷ J when moving at 15 ms⁻¹. What is its mass?
- 3) A snail of mass 57 g has a kinetic energy of 1.0 x 10⁻⁶ J. What is its speed?



Gravitational Potential Energy

Gravitational Potential Energy Depends on Height and Mass

When an object **falls**, its speed **increases**. As its speed increases, so does its **kinetic energy**. **Where** does it get this energy from?

Answer — from the gravitational potential energy it had before it fell:

If a body of **mass** m (in kilograms) is **raised** through a **height** h (in metres), the **gravitational potential energy** (in joules) it gains is given by: **gravitational potential energy** = **mass** \times **gravitational field strength** \times **height**

So, in symbols it reads:

$$E_n = m \times g \times h$$

The gravitational field strength, g, is the **ratio** of an object's **weight** to its **mass** (in newtons per kilogram, Nkg⁻¹).


At the surface of the Earth, g has an approximate value of 9.81 Nkg-1.

EXAMPLE: An 80.0 kilogram person in a lift is raised 45.0 metres. What is the increase in the person's gravitational potential energy?

$$E_p = m \times g \times h$$
, so $E_p = 80.0 \times 9.81 \times 45.0 = 35316 = 35300 \text{ J (to 3 s.f.)}$


EXAMPLE: A mass raised 15.0 metres gains gravitational potential energy equal to 50.0 joules. What is that mass?

$$E_p = m \times g \times h$$
. Dividing both sides by g and h gives $\frac{E_p}{g \times h} = m$, so $m = \frac{E_p}{g \times h} = \frac{50.0}{9.81 \times 15.0} = 0.3397... = 0.340 kg (to 3 s.f.)$



EXAMPLE: 725 kilograms of bricks are given 29 400 joules of gravitational potential energy. Through what height have they been raised?

$$E_p = m \times g \times h$$
. Dividing both sides by m and g gives $\frac{E_p}{m \times g} = h$, so $h = \frac{E_p}{m \times g} = \frac{29400}{725 \times 9.81} = 4.1337... = 4.13$ m (to 3 s.f.)



Liven up your roasts — pour on some graveytational potential energy...

- How much more gravitational potential energy does a 750 kg car have at the top of a 350 m high hill than at the bottom?
- 2) A crate is raised through 7.00 metres and gains 1715 J of gravitational potential energy. What is the mass of the crate?
- 3) A 65.0 kilogram hiker gains 24 700 joules of gravitational potential energy when climbing a small hill. How high have they climbed?



Conservation of Energy

The Conservation of Energy Applies to Falling Bodies

The principle of conservation of energy states that:

"Energy cannot be created or destroyed — it can only be converted into other forms"

So as long as you ignore air resistance...

...for a falling object:

kinetic energy gained (in joules) = gravitational potential energy lost (in joules)

...and for an object thrown or catapulted upwards:

gravitational potential energy gained (in joules) = kinetic energy lost (in joules)

This can be very useful in solving problems.

Read through the examples and then have a go at the questions afterwards. (In all the questions, you can ignore air resistance.)

EXAMPLE: An apple of mass 0.165 kilograms falls 2.00 metres from a tree. What speed does it hit the ground at?

$$E_p$$
 lost = $m \times g \times h$ = 0.165 × 9.81 × 2.00 = 3.2373 J
Therefore E_k gained = 3.2373 J. $E_k = \frac{1}{2} \times m \times v^2$.

Rearranging this gives
$$v = \sqrt{\frac{2 \times E_k}{m}}$$
, so $v = \sqrt{\frac{2 \times 3.2373}{0.165}} = 6.264...$

$$v = \sqrt{\frac{2 \times 3.2373}{0.165}} = 6.264...$$

= 6.26 ms⁻¹ (to 3 s.f.)



m = 0.225 kg

 $v = 10.0 \text{ ms}^{-1}$

 $m = 0.165 \text{ kg}^4$

EXAMPLE: A model clown of mass 225 grams is fired straight upwards from a cannon at 10.0 metres per second. How high does it get?

$$m = 225 g = 0.225 kg$$

$$E_k \text{ lost} = \frac{1}{2} \times m \times v^2 = \frac{1}{2} \times 0.225 \times 10.0^2 = 11.25 \text{ J}$$

Therefore,
$$E_p$$
 gained = 11.25 J. $E_p = m \times g \times h$.

Rearranging this gives
$$h = \frac{E_p}{m \times g}$$
, so $h = \frac{11.25}{0.225 \times 9.81}$



Today I'm practising conservation of energy — I'm staying in bed all day...

- A gymnast jumps vertically upwards from a trampoline with 2850 J of kinetic energy. They climb to a height of 5.10 m. What is the gymnast's mass?
- A book of mass 0.475 kilograms falls off a table top 92.0 centimetres from the floor. What speed is it travelling at when it hits the floor?
- 3) A bullet of mass 0.015 kilograms is fired upwards at 420 ms⁻¹. What height does it reach?



Work

Work — the Amount of Energy Transferred by a Force

When you move an object by applying a force to it, you are doing work (generally against another force) and transferring energy. For example:

- Lifting up a box you are doing work against gravity.
 The energy is transferred to gravitational potential energy.
- Pushing a wheely chair across a room you are doing work against friction.
 The energy is transferred to heat and kinetic energy.
- Stretching a spring you are doing work against the stiffness of the spring.
 The energy is transferred to elastic potential energy stored in the spring.

The amount of energy (in joules) that a force transfers is called the work done. It's given by:

work done by a force (in joules) = size of force (in newtons) × distance the object moves in the direction of the force while the force is acting (in metres)

Or, in symbols:

 $W = F \times s$

EXAMPLE: A 5.0 newton force pushes a box 3.0 metres in the same direction as the force. What is the work done by the force?

 $W = F \times s$, so $W = 5.0 \times 3.0 = 15 J$

The Force isn't Always in the Same Direction as the Movement

Sometimes the force acts in a **different direction** to the object's movement.

For example — when you **pull** on a sledge, the force acts **diagonally** along the rope but the sledge only moves **horizontally**.

So it's only the **horizontal part** of the force that is doing any work.

You need to use some **trigonometry** to find the work done:

direction of force, F, on sledge of motion angle, θ

horizontal force = $F\cos\theta$

NE

25 N

 $W = F \cos \theta \times s$

(See page 12 for more about resolving forces.)

EXAMPLE: A 25 newton force to the north-east pushes an object 15 metres in a northerly direction. What is the work done?

Use trigonometry to find the part of the force that acts in the direction of travel (i.e. north).

North-east = 045°, so $F \cos \theta = 25 \times \cos 45^\circ = 17.677... N$

So the work done is $W = F \cos\theta \times s = 17.677... \times 15 = 265.165... = 270$ (to 2 s.f.)

Work is F times s, what a way to make a living...

- 1) An upwards force of 25 newtons lifts an object 44 metres. What is the work done?
- 2) A boy pulls a toy cart 2.5 m along the ground. He applies a force of 17 N at an angle of 35° to the horizontal. How much work does he do?



Work

Work Done = Increase in Gravitational and Kinetic Energy

If a force does work on an object, a few things can happen. For example:

The work done can go entirely into the gravitational potential energy of the object:

EXAMPLE: A force does 74 J of work lifting a 3.0 kg cheese straight up. How high is the cheese lifted?



Work done = increase in gravitational potential energy, so:


$$W = m \times g \times h$$
, and so $h = \frac{W}{m \times g}$
 $h = \frac{74}{3.0 \times 9.81} = 2.514... = 2.5 \text{ m (to 2 s.f.)}$

The work done can go entirely into the kinetic energy of the object:

EXAMPLE: The same cheese (of mass 3.0 kg) is pushed horizontally along a frictionless surface with a force of 5.7 N over a distance of 12 m. What is its final speed, assuming it was initially at rest?

Work done = increase in kinetic energy, so:


$$W = F \times s = \frac{1}{2} \times m \times v^2$$
, so $v = \sqrt{2 \times \frac{F \times s}{m}}$
 $v = \sqrt{2 \times \frac{5.7 \times 12}{3.0}} = 6.752... = 6.8 \text{ ms}^{-1}$ (to 2 s.f.)



The work done can go into increasing both the kinetic and the gravitational energy:

EXAMPLE: The same cheese is fired diagonally upwards from a catapult. At its highest point it has climbed 19 m and is moving horizontally at 12 ms⁻¹. How much work was done on the cheese?

Work done = increase in
$$E_k$$
 + increase in E_p , so:
 $F \times s = (\frac{1}{2} \times m \times v^2) + (m \times g \times h)$
 $= (\frac{1}{2} \times 3.0 \times 12^2) + (3.0 \times 9.81 \times 19.0)$
 $= 775.17 = 780 \text{ J (to 2 s.f.)}$



Work done? No, you need to answer this question first ...

- A constant 125 N force lifts a 5.75 kg rocket vertically upwards. When the rocket reaches a height of 2.50 m the force is removed, but the rocket continues to move upwards. Calculate:
 - a) the work done by the force.
 - the gain in gravitational potential energy.
 - c) the gain in kinetic energy.
 - d) the upwards speed of the rocket immediately after the force is removed.



Power

Power — the Work Done Every Second

In mechanical situations, whenever energy is converted, work is being done. For example, when an object is falling, the force of gravity is doing work on that object equal to the increase in kinetic energy (ignoring air resistance).

The rate at which this work is being done is called the power.

You can calculate it using:

power (in watts) = work done (in joules) ÷ time taken (in seconds)



Power is measured in watts.

A watt is equivalent to one joule of work done per second.

EXAMPLE: If 10 joules of work are done in 2 seconds, what is the power?

$$P = W \div t = 10 \div 2 = 5 \text{ W}$$

EXAMPLE: For how long must a 3.2 kilowatt (3.2 \times 10³ watt) engine run to do 480 kilojoules (4.8 \times 10⁵ joules) of work?

$$P = W \div t$$

Multiplying both sides by t gives: $P \times t = W$ Then dividing both sides by P gives: $t = W \div P$

So,
$$t = W \div P = \frac{4.8 \times 10^5}{3.2 \times 10^3} = 150 \text{ s}$$



EXAMPLE: A force of 125 newtons pushes a crate 5.2 metres in 2.6 seconds. What is the power? (The motion is in the same direction as the force.)

First you need to find the work done (see page 18):

$$W = F \times s = 125 \times 5.2 = 650 \text{ J}$$

Then use W to find the power:

$$P = W \div t = 650 \div 2.6 = 250 \text{ W}$$

The power of love ain't that special — it's just a lot of work over time...

- 1) What is the power output of a motor if it does 250 joules of work in 4.0 seconds?
- 2) If a lift mechanism works at 14 kilowatts, how long does it take to do 91 kilojoules of work?
- An engine provides a force of 276 N to push an object 1.25 km in 2.5 minutes. What power is the engine working at?




Power

Power is also Force Multiplied By Speed

There's a **useful equation** you can **derive** for the **work done** by a force **every second** on an object moving at a **constant speed**. Follow through the working in the example below:

EXAMPLE: What power is a car engine working at if it produces a driving force of 2100 newtons when moving at a steady speed of 32 metres per second?

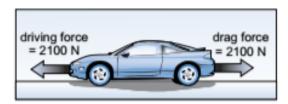

The car is moving at a steady speed. This means the forces on it are balanced, so the driving force must be equal to the drag force.

The power of the engine is given by $P = W \div t$.

 $W = F \times s$, so we can substitute for the work done, giving $P = \frac{F \times s}{t}$.

Now, $\frac{F \times s}{t}$ is the same as $F \times \frac{s}{t}$, so $P = F \times \frac{s}{t}$.

Finally we use the fact that $\frac{s}{t} = \frac{\text{distance travelled}}{\text{time taken}} = \text{the speed, } v.$

So,
$$P = F \times \frac{s}{t} = F \times v$$

power (in watts) = **force** (in newtons) \times **speed** (in metres per second)

For our example, $P = 2100 \times 32 = 67\ 200 = 67\ 000\ W$ (or 67 kW) (to 2 s.f.)

(This answer is rounded to 2 s.f. to match the data in the question — see page 1.)

IMPORTANT:

The formula $P = F \times v$ is **only** true when the object is moving at a **constant speed** in the **same direction as the force**.

Mooving forces with a lot of power — a stampeding herd of cows...

- 1) What is the power delivered by a train engine if its driving force of 1.80 x 10⁵ newtons produces a constant speed of 40.0 metres per second?
- 2) A skydiver is falling at a constant velocity of 45 metres per second. Gravity is doing work on her at a rate of 31 500 joules per second. What is her weight?
- 3) A car is travelling at steady speed. Its engine delivers a power of 5.20 x 10⁴ watts to provide a force of 1650 newtons. What speed is the car travelling at (in metres per second)?




Efficiency

How Much of What You Put In Do You Get Out?

- For most mechanical systems you put in energy in one form and the system gives out energy in another.
- 2) However, some energy is always converted into forms that aren't useful.
- For example, an electric motor converts electrical energy into heat and sound as well as useful kinetic energy.
- 4) You can measure the efficiency of a system by the percentage of total energy put in that is converted to useful forms.

Efficiency =
$$\frac{\text{Useful energy out}}{\text{Total energy in}} \times 100\%$$

EXAMPLE: A pirate uses a rope to pull a box of mass 4.5 kg vertically upwards through 5.0 m of water. He pulls with a force of 98 N. What is the efficiency of this system?



The energy the pirate puts in is the work he does pulling the rope.

The **useful energy out** is the gravitational potential energy gained by the box.

Some energy is converted to heat and sound by **friction** as the box is dragged through the water.

Total energy in = work done =
$$F \times s$$

= 98×5.0
= 490 J

Useful energy out = gravitational potential energy gained = $m \times g \times h$ = $4.5 \times 9.81 \times 5.0$ = 220.725 J

So, efficiency =
$$\frac{\text{Useful energy out}}{\text{Total energy in}} \times 100\%$$

= $\frac{220.725}{490} \times 100\% = 45.045... = 45\%$ (to 2 s.f.)

Efficiency – getting on with these questions instead of messing about...

- A motor uses 375 joules of electrical energy in lifting a 12.9 kilogram mass through 2.50 metres. What is its efficiency?
- 2) It takes 1.4 megajoules (1.4×10^6 joules) of chemical energy from the petrol in a car engine to accelerate a 560 kilogram car from rest to 25 metres per second on a flat road.
 - a) What is the gain in kinetic energy?
 - b) What is the efficiency of the car?




TOPIC 2: Energy GCSE Exam Questions

Q1.

The figure below shows a student before and after a bungee jump.

The bungee cord has an unstretched length of 20.0 m.

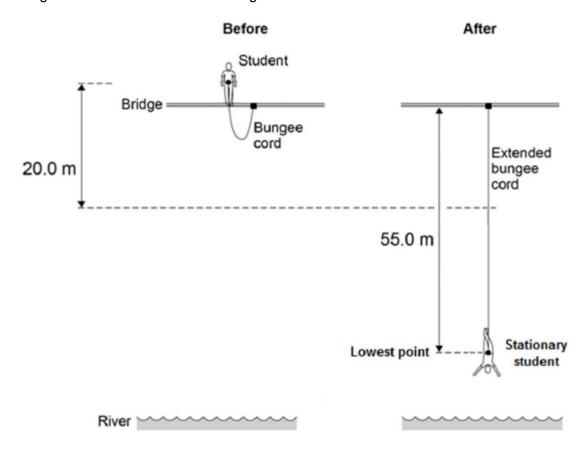

The mass of the student is 50.0 kg.

The gravitational field strength is 9.8 N / kg.

Write down the equation which links gravitational field strength, gravitational potential energy, height and mass.	
Calculate the change in gravitational potential energy from the position where the stud jumps to the point 20.0 m below.	dent

Change in gravitational potential energy = ______ J



(c) 80% of this change in gravitational potential energy has been transferred to the student's kinetic energy

	store.		
	How much has the student's kinetic energy store increased after falling 20.0 m?		
	Kinetic energy gained =	J	(1
(d)	Calculate the speed of the student after falling 20.0 m.		ζ.
	Give your answer to two significant figures.		
		_	
	Speed =	 m/s	(4
(e)	At the lowest point in the jump, the energy stored by the stretched bungee cord is 2	24.5 kJ.	(,
	The bungee cord behaves like a spring.		
	Calculate the spring constant of the bungee cord.		
	Use the correct equation from the Physics Equation Sheet.		
		_	
	Spring constant =	_ N / m	(3)
		Total 11 ma	rks




level ground

(4 marks)

TOPIC 2: Energy

A-Level Exam Question

The figure shows the track of a funfair ride.

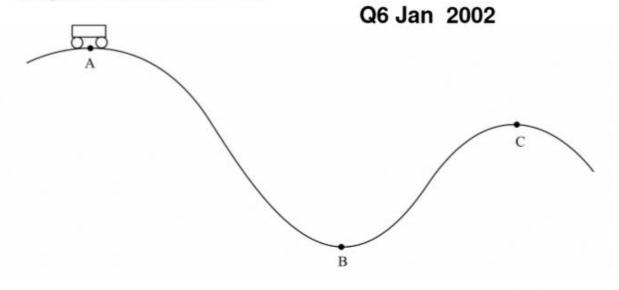

Carriages are pulled up to the highest point, A, of the ride and then released so that they follow the path ABC.

(a)	Point A is 18 m above the ground and point C is 12 m above the ground. Show that the maximum possible speed of the carriage at C is 11m s^{-1} .
	(3 marks)
(b)	The actual speed at C is less than $11\mathrm{ms^{-1}}$. Describe the energy changes that take place as the carriage moves from A to B to C.




TOPIC 3: Electricity Guidance and Practice

Current and Potential Difference

Electric Current — the Rate of Flow of Charge Around a Circuit

- In a circuit, negatively-charged electrons flow from the negative end of a battery to the positive end.
- 2) This flow of charge is called an electric current.
- However, you can also think of current as a flow of positive charge in the other direction, from positive to negative. This is called conventional current.



The electric current at a point in the wire is defined as:

current (in amperes, A) = $\frac{\text{the amount of charge passing the point (in coulombs, C)}}{\text{the time it takes for the charge to pass (in seconds, s)}}$

Or, in symbols:

$$I = \frac{Q}{t}$$

EXAMPLE: 585 C of charge passes a point in a circuit in 45.0 s. What is the current at this point?

$$I = \frac{Q}{t}$$
, so $I = \frac{585}{45.0} = 13.0 \text{ A}$

Potential Difference (Voltage) — the Energy Per Unit Charge

- In all circuits, energy is transferred from the power supply to the components.
- The power supply does work on the charged particles, which carry this energy around the circuit.
- The potential difference across a component is defined as the work done (or energy transferred) per coulomb of charge moved through the component.

Potential difference across component (in volts, V) = $\frac{\text{work done (in joules, J)}}{\text{charge moved (in coulombs, C)}}$

In symbols:

$$V = \frac{W}{Q}$$

EXAMPLE: A component does 10.8 J of work for every 2.70 C that passes through it. What is the potential difference across the component?

$$V = \frac{W}{Q}$$
, so $V = \frac{10.8}{2.70} = 4.00 \text{ V}$

Physicists love camping trips — they get to study po-tent-ial difference...


- How long does it take to transfer 12 C of charge if the average current is 3.0 A?
- 2) The potential difference across a bulb is 1.5 V. How much work is done to pass 9.2 C through the bulb?
- 3) A motor runs for 275 seconds and does 9540 J of work.
 If the current in the circuit is 3.80 A, what is the potential difference across the motor?



Current in Electric Circuits

Charge is Always Conserved in Circuits

- 1) As charge flows through a circuit, it doesn't get used up or lost.
- You can easily build a circuit in which the electric current can be split between two wires — two lamps connected in parallel is a good example.




- Because charge is conserved in circuits, whatever charge flows into a junction will flow out again.
- 4) Since current is rate of flow of charge, it follows that whatever current flows into a junction is the same as the current flowing out of it.

the sum of the currents going into the junction = the sum of the currents going out

This is **Kirchhoff's first law**. It means that the current is the **same** everywhere in a **series circuit**, and is **shared between the branches** of a **parallel circuit**.

 N.B. — current arrows on circuit diagrams normally show the direction of flow of conventional current (see p.25).

EXAMPLE: Use Kirchoff's first law to find the unknown current I₁.



Sum of currents in = sum of currents out


$$1.0 = 0.5 + 0.3 + I_1$$

$$1.0 = 0.8 + I_1$$

$$I_1 = 1.0 - 0.8$$

$$I_1 = 0.2 \text{ A}$$

EXAMPLE: Calculate the missing currents, I_1 and I_2 , in this circuit.



Looking at the junction immediately after I_1 :

$$I_1 = 1.2 + 0.7$$

$$I_1 = 1.9 \text{ A}$$

And looking at the junction immediately before I_1 :


$$1.5 + I_2 = 1.9$$

$$I_2 = 1.9 - 1.5$$


$$I_2 = 0.4 \text{ A}$$

Conserve charge — make nature reserves for circuit boards...

1) What is the value of I,?



2) What is the value of I,?





Potential Difference in Electric Circuits

Energy is Always Conserved in Circuits


- Energy is given to charged particles by the power supply and taken off them by the components in the circuit.
- Since energy is conserved, the amount of energy one coulomb of charge loses when going around the circuit must be equal to the energy it's given by the power supply.
- 3) This must be true regardless of the route the charge takes around the circuit. This means that:


For any **closed loop** in a circuit, the **sum** of the **potential differences** across the components **equals** the **potential difference** of the **power supply**.

This Kirchhoff's second law. It means that:

- In a series circuit, the potential difference of the power supply is split between all the components.
- In a parallel circuit, each loop has the same potential difference as the power supply.

EXAMPLE: Use Kirchoff's second law to calculate the potential differences across the resistor, V_R , and the lamp, V_r , in the circuit shown on the right.






First look at just the top loop:

p.d. of power supply = sum of p.d.s of components in top loop $6 = 2 + V_R$

So
$$V_R = 6 - 2 = 4 \text{ V}$$




Now look at just the outside loop:

p.d. of power supply = sum of p.d.s of components in outside loop $6 = 2 + V_t + 2$

So
$$V_1 = 6 - 2 - 2 = 2V$$

This page is potentially tricky — so have a read of it all again...

- 1) For the circuit on the right, calculate:
 - a) the voltage across the motor, V_M .
 - b) the voltage across the loudspeaker, V_s.
- 2) A third loop containing two filament lamps is added to the circuit in parallel with the first two loops. What is the sum of the voltages of the two filament lamps?





Resistance

Resistance — The Ratio of Potential Difference to Current

- 1) If there's a potential difference across a component a current will flow through it.
- Usually, as the potential difference is increased the current increases this makes sense
 if you think of the potential difference as a kind of force pushing the charged particles.
- 3) You can link current and potential difference by defining "resistance":

Resistance of component (in ohms, Ω) = $\frac{\text{potential difference across component (in volts, V)}}{\text{current passing through component (in amps, A)}}$

Or, in symbols: R:

Multiplying both sides by I gives: $V = I \times R$

- Components with a low resistance allow a large current to flow through them, while components with a high resistance allow only a small current.
- 5) The resistance isn't always constant though it can take different values as the current and voltage change, or it can change with conditions like temperature and light level.

EXAMPLE: If a potential difference of 12 V across a component causes a current of 1.0 mA to flow through it, what is the resistance of the component?

$$R = \frac{V}{I}$$
, so $R = \frac{12}{1.0 \times 10^{-3}} = 12\ 000\ \Omega$, or 12 k Ω

EXAMPLE: What potential difference must be applied across a lamp with a resistance of 200 Ω in order for a current of 0.2 A to flow through it?

$$V = I \times R$$
, so $V = 0.2 \times 200 = 40 \text{ V}$

EXAMPLE: What current will flow through an 850 Ω resistor if a potential difference of 6.3 V is applied across it?

 $V = I \times R$. Dividing both sides by R gives $I = \frac{V}{R}$, so $I = \frac{6.3}{850} = 0.007411... =$ **0.0074 A**(or 7.4 mA) (to 2 s.f.)



Ohm my, look at that — more questions to do...

- If a current of 2.5 amps flows through a component with a resistance of 15 ohms, what is the potential difference across the component?
- 2) What current will flow through a 2500 Ω resistor if the voltage across it is 6.0 volts?
- 3) What is the resistance of a component if 1.5 volts drives a current of 0.024 amps through it?




I-V Graphs

Ohm's Law Says Potential Difference is Proportional to Current

- An I-V graph is a graph of current against potential difference for a component. For any I-V graph, the resistance at a given point is the potential difference divided by the current $(R = \frac{V}{I})$.
- Provided the temperature is constant, the current through an ohmic component (e.g. a resistor) is directly proportional to the **potential difference** across it $(V \propto I)$. This is called **Ohm's Law**.



- 3) An ohmic component's I-V graph is a straight line, with a gradient equal to 1 ÷ the resistance of the component. The resistance (and therefore the gradient) is constant.
 - So for an ohmic component, doubling the potential difference doubles the current.
 - Often external factors, such as temperature, will have a significant effect on resistance, so you need to remember that Ohm's law is only true for components like resistors at constant temperature.



4) Sometimes you'll see a graph with negative values for p.d. and current. This just means the current is flowing the other way (so the terminals of the power supply have been switched).


EXAMPLE: Look at the *I-V* graph for a resistor on the right. What is its resistance when the potential difference across it is: a) 10 V, b) 5 V, c) -5 V, d) -10 V?



b)
$$R = \frac{V}{I} = \frac{5}{0.5} = 10 \Omega$$

c)
$$R = \frac{V}{I} = \frac{-5}{-0.5} = 10 \Omega$$
 d) $R = \frac{V}{I} = \frac{-10}{-1} = 10 \Omega$


d)
$$R = \frac{V}{I} = \frac{-10}{1} = 10 \Omega$$




I-V Graphs for Other Components Aren't Straight Lines

The I-V graphs for other components don't have constant gradients. This means the resistance changes with voltage.

- As the p.d. across a filament lamp gets larger, the filament gets hotter and its resistance increases.
- Diodes only let current flow in one direction. The resistance of a diode is very high in the other direction.





I-Ve decided you need amp-le practice to keep your knowledge current...

- State Ohm's law.
- Sketch I-V graphs for: a) an ohmic resistor, b) a filament lamp, c) a diode.



Power in Circuits

Power — the Rate of Transfer of Energy

- 1) Components in electrical circuits transfer the energy carried by electrons into other forms.
- 2) The work done each second (or the energy transferred each second) is the power of a component:

power (in watts, W) =
$$\frac{\text{work done (in joules, J)}}{\text{time taken (in seconds, s)}}$$

Or, in symbols:
$$P = \frac{W}{t}$$

This is the same as the equation for mechanical power that you saw on page 20.

EXAMPLE: A lift motor does 3.0×10^5 J of work in a single one-minute journey. At what power is it working?

$$P = \frac{W}{t}$$
, so $P = \frac{3.0 \times 10^5}{60} = 5000 \text{ W}$ (or 5 kW)

Calculating Power from Current and Potential Difference

The work done is equal to the potential difference across the component multiplied by the amount of charge that has flowed through it $(W = V \times Q)$ — see p.25.

So:
$$P = \frac{V \times Q}{t}$$

The amount of charge that flows through a component is equal to the current through it multiplied by the time taken $(Q = I \times t)$ — see p.25 again.

So:
$$P = \frac{V \times I \times t}{t}$$

Cancelling the t's gives: $P = V \times I$

power (in watts) = potential difference (in volts) × current (in amps)

EXAMPLE: If the potential difference across a component is 6 volts and the current through it is 0.50 milliamps (5.0 × 10⁻⁴ amps), at what rate is it doing work?

$$P = V \times I$$
, so $P = 6 \times 5.0 \times 10^{-4} = 0.003 \text{ W}$ (or 3 mW)

Knowledge is power — make sure you know these power equations...

- 1) What is the power output of a component if the current through it is 0.12 amps when the potential difference across it is 6.5 volts?
- An electric heater has an operating power of 45 W.
 - a) What current passes through the heater when the potential difference across it is 14 volts?
 - b) How much work does the heater do in 12 seconds?



Power in Circuits

You Can Combine the Equations for Power and Resistance

You can **combine** the last equation for the power of an electrical component, $P = V \times I$, with the **equation** for resistance, $R = \frac{V}{I}$ (see p.28), to create two **more useful** equations.

1) Substitute
$$V = I \times R$$
 into $P = V \times I$ to get: $P = I \times R \times I = I^2R$

power (in watts) = $[current (in amps)]^2 \times resistance (in ohms)$

2) Or substitute
$$I = \frac{V}{R}$$
 into $P = V \times I$ to get: $P = V \times \frac{V}{R} = \frac{V^2}{R}$

$$power (in watts) = \frac{[potential difference (in volts)]^{2}}{resistance (in ohms)}$$

Here are some examples — the key here is choosing the **right equation** to use. If the question gives you the value of two variables and asks you to find a third, you should choose the equation that relates these three variables. You might have to **rearrange** it before using it.

EXAMPLE: What is the power output of a component with resistance 100 Ω if the current through it is 0.2 A?

$$P = I^2 R$$
, so $P = 0.2^2 \times 100 = 4 \text{ W}$

EXAMPLE: Resistors get hotter when a current flows through them. If you double the current through a resistor, what happens to the amount of heat energy produced every second?

It **increases by a factor of 4** — this is because the current is squared in the expression for the power (you can substitute some values of *I* and *R* in to check this).

EXAMPLE: If a lamp has an operating power of 6.5 W and the potential difference across it is 12 V, what is its resistance?

$$P = \frac{V^2}{R}$$
, so multiplying both sides by R gives $P \times R = V^2$, and dividing by P gives:

$$R = \frac{V^2}{P}$$
, so $R = \frac{12^2}{6.5} = 22.153... = 22 Ω (to **2 s.f.**)$

(This answer is rounded to 2 s.f. to match the data in the question — see page 1.)

Watts up with your watch, Dr Watson? Dunno, but it sure is i2rksome...

- 1) What is the power output of a 2400 Ω component if the current through it is 1.2 A?
- A motor has a resistance of 100 Ω. How much work does it do in 1 minute if it is connected to a 6 V power supply?
- 3) The current through a 6.0 W lamp is 0.50 A. What is the resistance of the lamp?



TOPIC 3: Electricity GCSE Exam Questions

Q1.


The current in a circuit depends on the potential difference (p.d.) provided by the cells and the total resistance of the circuit.

- (a) Using the correct circuit symbols, draw a diagram to show how you would connect 1.5 V cells together to give a p.d. of 6 V.
- (b) **Figure 1** shows a circuit containing an 18 V battery.

Two resistors, **X** and **Y**, are connected in series.

- X has a resistance of 3 Ω.
- There is a current of 2 A in X.

Figure 1

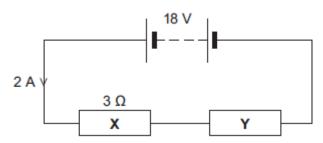

(i) Calculate the p.d. across X.

P.d. across **X** = ______V

(2)

(ii) Calculate the p.d. across Y.

P.d. across **Y** = ______ V

(2)




(iii)	Calculate the total resistance of X and Y .	

Total resistance of **X** and **Y** = _____
$$\Omega$$

(c) Figure 2 shows a transformer.

Figure 2

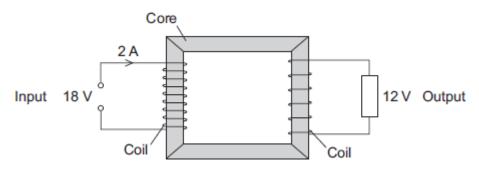

Explain v	vhy.
he trans	sformer is 100% efficient.
no tranc	John to 100 / Omoloni.
Calculate	e the output current for the transformer shown in Figure 2.

Output current = _____ A

(2)

(2)

(2)

(Total 12 marks)



TOPIC 3: Electricity A-Level Question

(a)	Sta	te the	e difference b	etween the direction	ons of convention	al current and electr	on flow.
							[1]
(b)	Circ	le or	ne or more of	the combinations	of units which cou	lld act as a unit for c	urrent.
			Js	Cs ⁻¹	$V\Omega^{-1}$	JC ⁻¹	[2]
(c)			shows a curre etal as shown		al wire X connec	ted to a longer thinn	er wire Y of the
				X	Υ	<u> </u>	
	(i)	Sta	te why the cu	rrent in Y must also			
	(ii)	Wir	e Y has half t	he cross-sectional	area of the thicke	r wire X and is three	times as long.
		The	resistance R	χ of X is 12.0 Ω .			
		1	Show that the	e resistance <i>R</i> _Y of	$ extbf{Y}$ is 72 Ω.		
		2	Calculate the	e total resistance F	of both wires.		



TOPIC 4: Waves Guidance and Practice


Waves

Waves Transfer Energy Without Transferring Matter

- Waves are oscillations that transfer energy like water waves or electromagnetic waves.
- 2) Waves carry energy from one place to another without transferring matter.

Transverse Waves Vibrate at 90° to the Direction of Travel


Transverse waves have **vibrations** at **90°** to the direction of **energy transfer** and **travel**. E.g. **electromagnetic** waves (like light) or shaking a Slinky® spring from side to side.



Longitudinal Waves Vibrate Along the Direction of Travel


Longitudinal waves vibrate in the **same direction** as the direction of **energy transfer** and **travel**. They are made of alternate **compressions** and **rarefactions** of the medium.


E.g. sound waves or pushing on the end of a Slinky® spring.



You Can Show Wave Motion on a Graph

A displacement-distance graph shows how far each part of the wave is displaced from its equilibrium position for different distances along the wave.





You can also consider just one point on a wave and plot how its displacement changes with time. This is a displacement-time graph.

Displacement = how far a point on the wave has moved from its equilibrium position **Amplitude** (A) = the largest possible displacement from the equilibrium position **Wavelength** (λ) = the length of one wave cycle, from crest to crest or trough to trough **Period** (T) = the time taken for a whole cycle (vibration) to complete, or to pass a given point

Transverse waves are terrible singers — they always skip the chorus...

- Sketch a graph of displacement against distance for five full wavelengths of a wave with amplitude 0.01 metres and wavelength 0.02 metres.
- Sketch a graph of displacement against time for three complete oscillations of one part of a wave of amplitude 0.05 metres and time period 0.8 seconds.



Frequency and the Wave Equation

Frequency is the Number of Oscillations per Second

If a wave has a **time period** of 0.2 seconds, it takes 0.2 seconds for a point on the wave to complete **one full oscillation**. So in one second the point will complete **5 full oscillations**.

The number of oscillations that one point on a wave completes every second is called the **frequency** of the wave. It has the symbol **f** and is measured in **hertz** (Hz).

So a wave with a time period of 0.2 seconds has a frequency of 5 hertz.

The equation for frequency is:

Frequency =
$$\frac{1}{\text{time period}}$$
 or $f = \frac{1}{T}$

EXAMPLE: A wave has a frequency of 350 Hz. What is the period of oscillation of one point on that wave?

$$T = \frac{1}{f} = \frac{1}{350} = 0.002857... = 0.0029 \text{ s (to 2 s.f.)}$$

The Wave Equation Relates Speed, Frequency and Wavelength

For a wave of **frequency** f (in hertz), **wavelength** λ (in metres) and **wave speed** v (in metres per second) the wave equation is:

speed = frequency × wavelength or
$$v = f \times \lambda$$

EXAMPLE: Sound is a longitudinal wave. If a sound with a frequency of 250 Hz has a wavelength of 1.32 metres in air, what is the speed of sound in air?

$$v = f \times \lambda = 250 \times 1.32 = 330 \text{ ms}^{-1}$$

EXAMPLE: All electromagnetic waves travel at 3.0 × 10⁸ ms⁻¹ in a vacuum. If a radio wave has a wavelength of 1.5 km in a vacuum, what is its frequency?

$$v = f \times \lambda$$
, so $f = \frac{v}{\lambda} = \frac{3.0 \times 10^8}{1.5 \times 10^3} = 200\ 000\ Hz$ (or 200 kHz)

Wave equation: lift arm + oscillate hand = pleasant non-vocal greeting...


- A radio wave has a frequency of 6.25 x 10⁵ Hz. What is the time period of the radio wave?
- 2) A sound wave has a time period of 0.0012 s. Find the frequency of the sound.
- 3) A wave along a spring has a frequency of 3.5 Hz and a wavelength of 1.4 m. What is the speed of the wave?
- 4) A wave has time period 7.1 s and is moving at speed 180 ms⁻¹.
 - a) What is the frequency of the wave?
 - b) What is the wavelength of the wave?



Superposition of Waves

Superposition Happens When Two Waves Meet


- If two waves meet (e.g. waves on a rope travelling in opposite directions), their displacements will briefly combine.
- They become one single wave, with a displacement equal to the displacement of each individual wave added together.

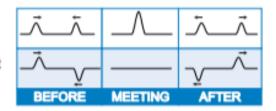

- This is called superposition.
- 4) If two crests meet, the heights of the waves are added together and the crest height increases. This is called constructive interference because the amplitude of the superposed waves is larger than the amplitude of the individual waves.
- 5) If the crest of one wave meets the trough of another wave, you subtract the trough depth from the crest height. So if the crest height is the same as the trough depth they'll cancel out. This is called destructive interference because the amplitude of the superposed waves is smaller than that of the individual waves.
- 6) After combining, the waves then carry on as they were before.

If Waves are In Phase they Interfere Constructively

 Two waves travelling in the same direction are in phase with each other when the peaks of one wave exactly line up with the peaks of the other, and the troughs of one wave exactly line up with the troughs of the other.



If these waves are superposed, they interfere constructively.
 The combined amplitude of the final wave is equal to the sum of the individual waves.

If Waves are Out of Phase they Interfere Destructively

- Two waves are exactly out of phase if the peaks of one wave line up with the troughs of the other (and vice versa).
- If these waves are superposed, they interfere destructively.
 If the individual waves had the same amplitude originally, they will cancel each other out.

Constructive interference — getting woken up early by noisy builders...


- What is meant by:
 - a) superposition?
 - b) constructive interference?
 - c) destructive interference?
- 2) A wave with an amplitude of 0.67 mm is superposed with an identical wave with the same amplitude. The waves are in phase. What is the amplitude of the superposed wave?
- 3) Two waves, both of amplitude 19.1 m, are exactly out of phase.
 What is the amplitude of the single wave formed when they superpose?
- 4) A wave with an amplitude of 35 cm is in phase with a 41 cm amplitude wave. The waves meet and constructive interference occurs. What is the amplitude of the combined wave?



Reflection and Diffraction

Waves can be Reflected

 When a wave hits a boundary between one medium and another, some (or nearly all) of the wave is reflected back.




- The angle of the incident (incoming) wave is called the angle of incidence, and the angle of the reflected wave is called the angle of reflection.
- The angles of incidence and reflection are both measured from the normal — an imaginary line running perpendicular to the boundary.
- 4) The law of reflection says that:


angle of incidence (i) = angle of reflection (r)

Diffraction — Waves Spreading Out


- Waves spread out ('diffract') at the edges when they pass through a gap or pass an object.
- The amount of diffraction depends on the size of the gap relative to the wavelength of the wave. The narrower the gap, or the longer the wavelength, the more the wave spreads out.

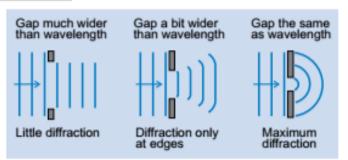

A narrow gap is one about the same size as the wavelength of the wave.So whether a gap counts as narrow or not depends on the wave.



- If light is shone at a narrow slit about the same width as the wavelength of the light, the light diffracts.
- 5) The diffracted light forms a diffraction pattern of bright and dark fringes. This pattern is caused by constructive and destructive interference of light waves (see p.34).
 - You get diffraction around the edges of obstacles too.
 - The shadow is where the wave is blocked.
 The wider the obstacle compared to the wavelength, the less diffraction it causes, so the longer the shadow.



Mind the gap between the train and the platform — you might diffract...

- What is the law of reflection?
- Sketch a diagram of a light wave being reflected at an angle by a mirror. Label the incident and reflected waves, the normal, the angle of incidence and the angle of reflection.
- 3) A water wave travels through a gap about as wide as its wavelength. The gap is made slightly larger. How will the amount of diffraction change?
- 4) What happens when light is shone at a slit about the same size as its wavelength?




Refraction


Waves can be Refracted

- Reflection isn't all that happens when a wave meets a boundary. Usually, some of it is refracted too — it passes through the boundary and changes direction.
- Waves travel at different speeds in different media.
 E.g. electromagnetic waves, like light, usually travel slower in denser media.

If a wave hits a boundary 'face on', it slows down without changing direction.



But if the wave hits at an angle, this bit slows down first...



...while this bit carries on at the same speed until it meets the boundary. The wave changes direction.


When an electromagnetic wave enters a **denser** medium, it bends **towards** the normal. When one enters a **less dense** medium, it bends **away** from the normal.

The Refractive Index is a Ratio of Speeds

The **refractive index** of a medium, *n*, is the **ratio** of the speed of light in a **vacuum** to the speed of light in **that medium**. **Every** transparent material has a refractive index and different materials have **different refractive indices**.

You can Calculate the Refractive Index using Snell's Law

When an **incident ray** travelling in **air** meets a boundary with **another material**, the **angle of refraction** of the ray, *r*, depends on the **refractive index** of the material and the **angle of incidence**, *i*.



This is called **Snell's Law**.

refractive index (n) =
$$\frac{\sin i}{\sin r}$$

EXAMPLE: The angle of incidence of a beam of light on a glass block is 65°. The angle of refraction is 35°. What is the refractive index of the block?

$$n = \frac{\sin i}{\sin r} = \frac{\sin 65}{\sin 35} = 1.580... = 1.6$$

You can **rearrange** Snell's Law to find an angle of refraction or incidence, e.g. $r = \sin^{-1}(\frac{\sin i}{n})$.

This page has a high refractive index — it's really slowed me down...

- A wave hits a boundary between two media head on. Describe what happens to the wave.
- 2) A wave hits a boundary between two media at an angle. Describe what happens to the wave.
- 3) A light wave travelling in air hits a transparent material at an angle of 72° to the normal to the boundary. The angle of refraction is 39°. What is the refractive index of the material?
- 4) A light wave hits the surface of the water in a pond at 23° to the normal. The refractive index of the pond water is 1.3. What is the angle of refraction?



TOPIC 4: Waves GCSE Exam Questions

Q1.Ultrasound waves can be passed through the body to produce medical images.


When ultrasound waves are directed at human skin most of the waves are reflected.

If a material called a 'coupling agent ? is placed on the skin it allows most of the ultrasound waves to pass through the skin and into the body.

What is 'ultrasound'?	
Two ultrasound frequencies that are used are 1.1 MHz and 3.0 MHz.	
The speed of ultrasound in water is 1500 m / s.	
Calculate the wavelength of the 3.0 MHz waves in water.	
Wavelength = m	
The coupling agent used with ultrasound is usually a gel	(3)
Suggest why water is not used.	
	(1)
	Two ultrasound frequencies that are used are 1.1 MHz and 3.0 MHz. The speed of ultrasound in water is 1500 m / s. Calculate the wavelength of the 3.0 MHz waves in water. Wavelength = m The coupling agent used with ultrasound is usually a gel. Water would be a good coupling agent.

- (d) **Figure 1** shows a coupling agent being tested.
 - An ultrasound transmitter emits waves.
 - The waves pass through the coupling agent and then through the water.
 - The waves are detected by the ultrasound receiver.



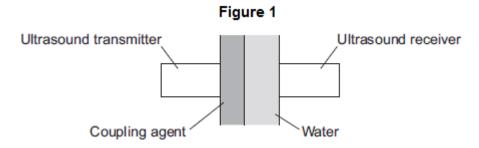

A scientist tests different coupling agents.

Suggest which variables she must control.

Tick (✓) two boxes.

	Tick (✓)
The amount of light in the room	
The colour of the coupling agent	
The width of the coupling agent	
The width of the water	

(e) The table shows the results for coupling agents A, B, C, D, E, F and G.

They were tested using the two frequencies, 1.1 MHz and 3.0 MHz.

The results show how well the waves pass through the coupling agent compared with how they pass through water. The results are shown as a percentage.

100% means that the coupling agent behaves the same as water.

Coupling agent	Coupling agent percentage using 1.1 MHz	Coupling agent percentage using 3.0 MHz
Α	108	100
В	105	100
С	104	98
D	100	98
E	98	98
F	95	99
G	89	88

(i) Which coupling agent allows most ultrasound to pass through at

(2)



both frequencies?	

(ii) Which coupling agent performs the same for both frequencies?




(1)

(1)

(f) Figure 2 shows an ultrasound transmitter sending waves into a patient's body.

The waves enter the body and move towards a kidney.

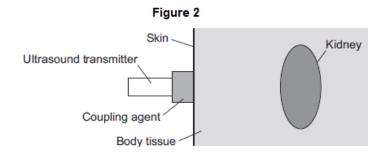


The transmitter also detects the ultrasound waves.

The transmitter is connected to an oscilloscope.

(i)

Figure 3 shows the trace on the screen of the oscilloscope.

 ${f J}$ represents the intensity of the waves emitted by the transmitter.

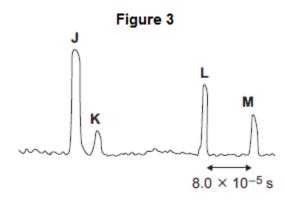


Explain the intensities at K , L and M		



The speed of ultrasound waves in the	body is 1500 m/s.	
Use information from Figure 3 to calc	ulate the maximum width of the k	kidney.
		
Maximum width of kidney =	m	

TOPIC 4: Waves A-Level Exam Question

The figure below shows, at a given instant, the surface of the water in a ripple tank when plane water waves are travelling from left to right.

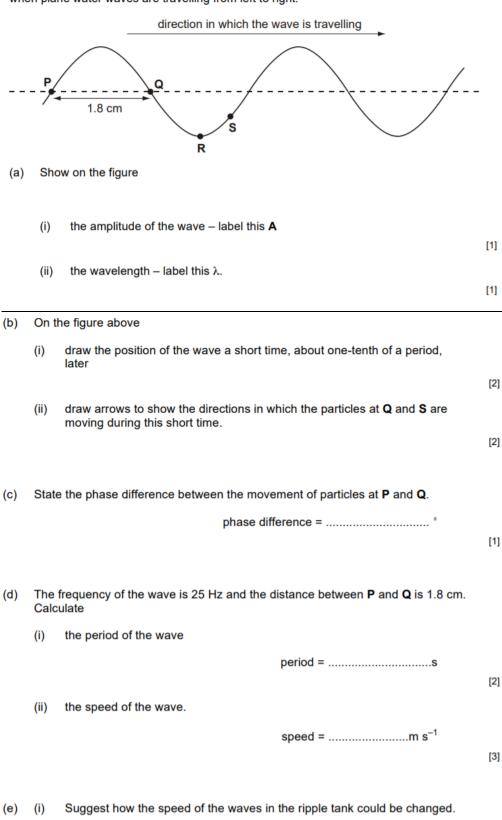

[1]